


1-1/2 THRU 5 TON COILS




FEATURES

- Copper Tube / Lanced Aluminum Fin Coil
- Three Primary Condensate Drain Connections
- Field Selectable Secondary Drain Location
- Polymer Thermoset Sloped Drain Pan
- Sweat Connect
- Dry Air Holding Charge
- Upflow / Downflow Applications
- Coils Feature Orifice Pin Refrigerant Metering
- Thermostatic Expansion Valve Kit Available

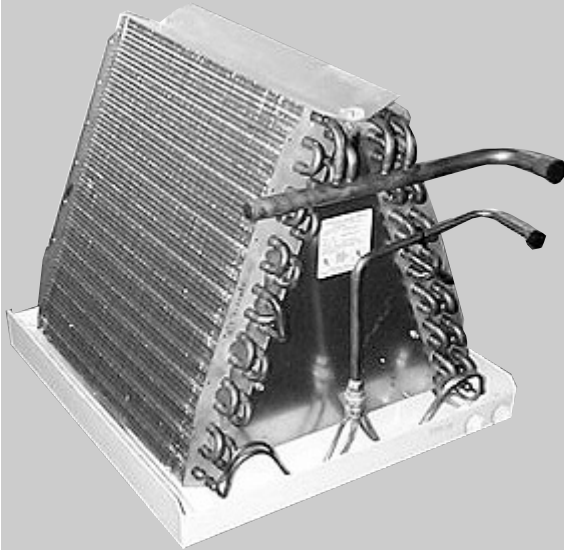

Listed By
Underwriters
Laboratories

DIMENSIONS

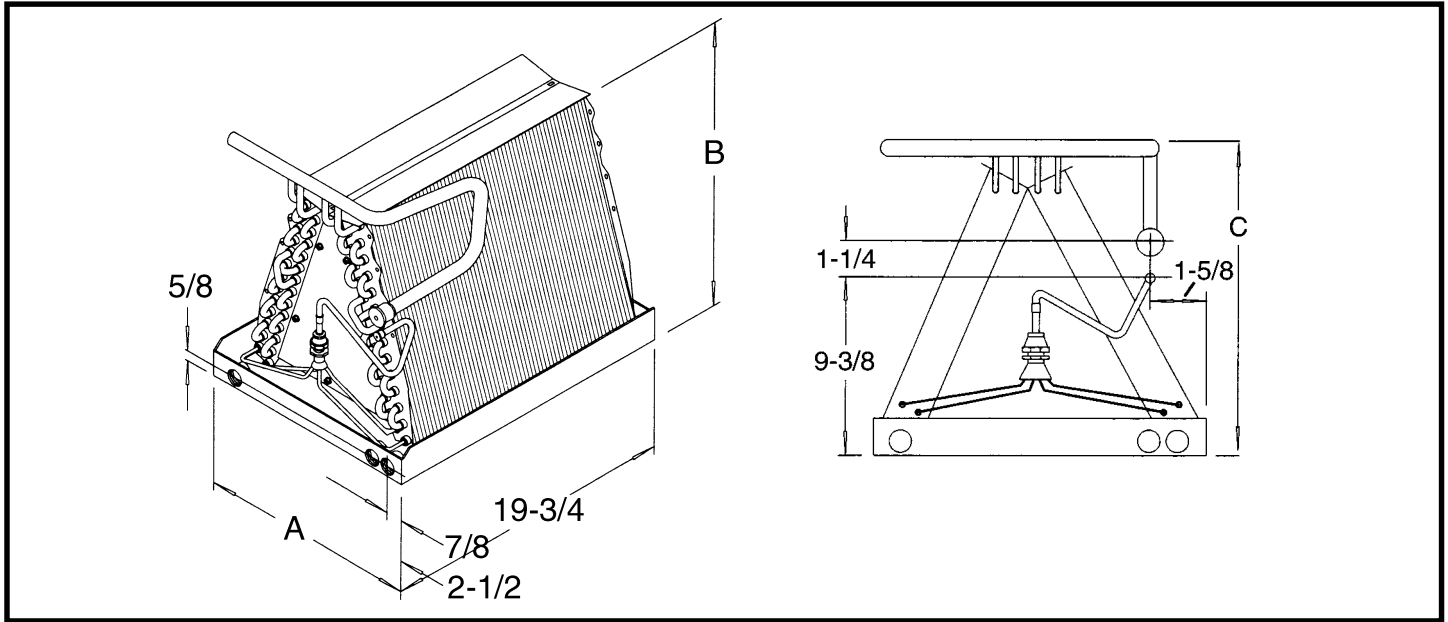


EEA COILS								
Model No.	Dimensions (inches)			Weights		Refrigerant Control	Connection Sweat	
	A	B	C	Net	Shpg.		Liq. OD	Suc. OD
EEA24B15A	14-3/4	10-1/2	13-1/2	14	18	.053	5/16	3/4
EEA36F19A	18-1/8	16-1/8	-	22	26	.065	5/16	3/4
EEA48F19A	18-1/8	18-1/2	-	30	34	.078	3/8	7/8
EEA60J22A	21-7/8	21-7/8	-	40	48	.079	3/8	7/8

AIRFLOW PERFORMANCE DATA (CFM vs DRY WET STATIC @ INCHES WATER COLUMN)																											
MODEL NUMBER	500		600		700		800		900		1000		1100		1200		1300		1400		1500		1600		1700		
	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	
EEA24B15	.09	.12	.13	.16	.18	.20	.23	.26	.28	.32																	
EEA36F19							.13	.17	.16	.20	.19	.24	.22	.28	.26	.33											
EEA48F19											.21	.27	.25	.32	.29	.37	.33	.43	.33	.49							
EEA60J22															.21	.25	.24	.28	.28	.33	.31	.37	.35	.42	.38	.46	

ACCESSORIES	
MODEL NUMBER	DESCRIPTION / USE WITH
AMF153TKB	TXV Kit, 2 – 3 Ton
AMF355TKB	TXV Kit, 3 1/2 – 5 Ton

2 THRU 4 TON COILS FOR MOBILE HOMES

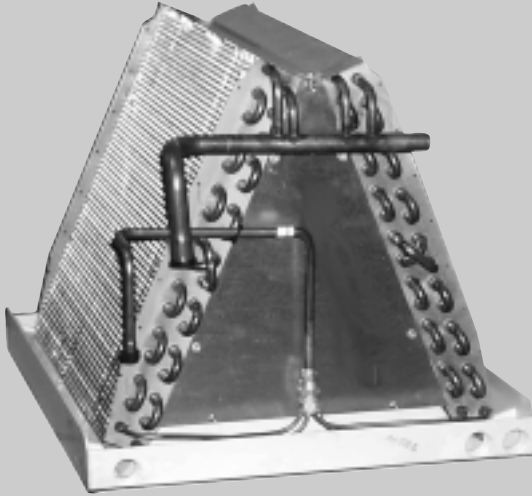


FEATURES

- Copper Tube / Lanced Aluminum Fin Coil
- Three Primary Condensate Drain Connections
- Field Selectable Secondary Drain Location
- Polymer Thermoset Sloped Drain Pan
- Sweat Connect
- Dry Air Holding Charge
- Upflow / Downflow Applications
- Coils Feature Orifice Pin Refrigerant Metering
- Thermostatic Expansion Valve Kit Available
- Shipped with Fittings and Adapter Plates
- Shipped with Condensate Drain Hose and Trap



Listed By
Underwriters'
Laboratories

DIMENSIONS

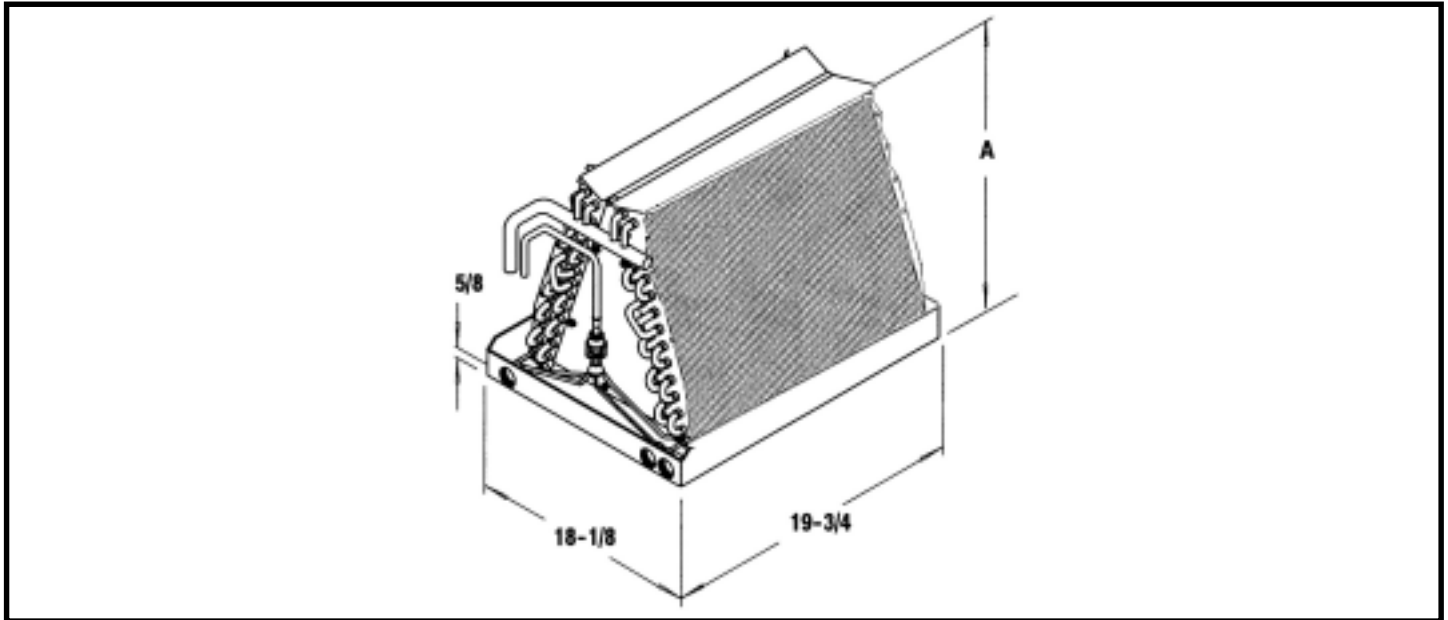


EMH COILS						
Model No.	Height (inches)	Weights		Refrigerant Control	Connection Sweat	
	A	Net	Shpg.		Liq. OD	Suc. OD
EMH24F19A	14-1/2	17	21	.059	5/16	3/4
EMH30F19A	16-1/8	22	26	.065	5/16	3/4
EMH36F19A	18-5/8	26	30	.072	5/16	3/4
EMH42F19A	18-1/2	30	34	.078	3/8	7/8
EMH48F19A	18-1/2	33	39	.079	3/8	7/8

MODEL NUMBER	AIRFLOW PERFORMANCE DATA (CFM vs DRY WET STATIC @ INCHES WATER COLUMN)																							
	600		700		800		900		1000		1100		1200		1300		1400		1500		1600		1700	
	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet
EMH24	.11	.12	.14	.15	.18	.19	.23	.23	.27	.29														
EMH30					.13	.17	.16	.20	.19	.24	.22	.25	.26	.33										
EMH36									.19	.21	.21	.24	.25	.26	.29	.33	.33	.37						
EMH42									.21	.27	.25	.32	.29	.37	.33	.43	.33	.49						
EMH48											.20	.25	.23	.29	.27	.35	.32	.40	.36	.45	.41	.52	.47	.58

ACCESSORIES	
MODEL NUMBER	DESCRIPTION / USE WITH
AMF153TKB	TXV Kit, 2 – 3 Ton
AMF355TKB	TXV Kit, 3 1/2 – 4 Ton

2, 2-1/2, 3 TON COILS FOR PLENUM INSTALLATION

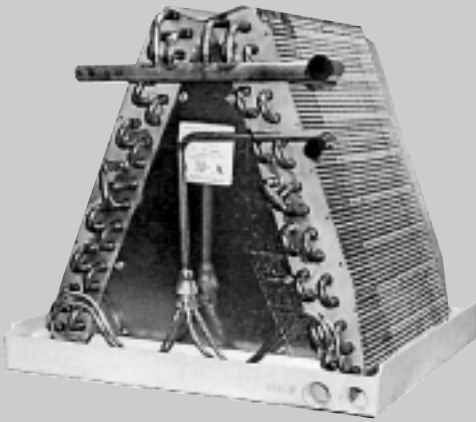

FEATURES

- Extra Length Refrigerant Tubing Stubs
- Copper Tube / Lanced Aluminum Fin Coil
- Two Primary Condensate Drain Connections
- Polymer Thermoset Sloped Drain Pan
- Sweat Connect
- Dry Air Holding Charge
- Upflow Connections
- Thermostatic Expansion Valve Kit Available



Listed By
Underwriters'
Laboratories


DIMENSIONS

APPLICATION NOTES:

The plenum coils are designed to be installed directly into the furnace plenum on an upflow application **ONLY**. Minimum plenum size is 18-1/2" deep by 17-5/8" wide.

Minimum Clearances

Coils must be installed so the drain pan is at least 2" above the heat exchanger on a gas furnace and 5" above the heat exchanger for an oil furnace.

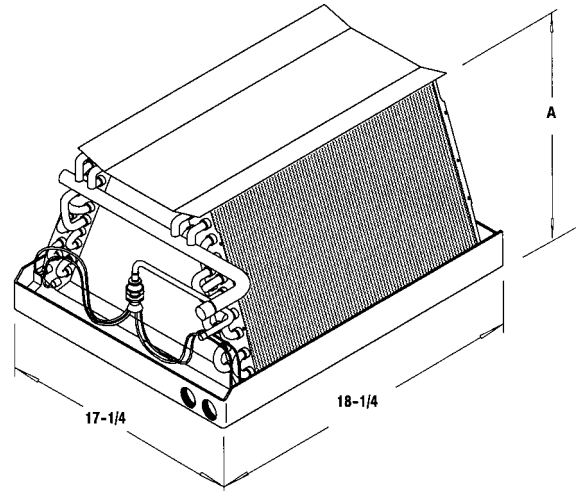

EPP COILS						
Model No.	Height (inches)	Weights		Refrigerant Control	Connection Sweat	
	A	Net	Shpg.		Liq. OD	Suc. OD
EPP024D17A	10-3/4	15	19	.059	5/16	3/4
EPP030D17A	14-1/4	22	26	.065	5/16	3/4
EPP036D17A	16-1/4	26	30	.072	5/16	3/4

MODEL NUMBER	AIRFLOW PERFORMANCE DATA (CFM vs DRY/WET STATIC @ INCHES WATER COLUMN)															
	500		600		700		800		900		1000		1100		1200	
	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet
EPP024	.14	.17	.18	.21	.23	.25	.28	.31	.33	.37						
EPP030			.12	.13	.15	.16	.19	.20	.24	.24	.28	.30				
EPP036							.19	.23	.23	.28	.29	.34	.34	.40	.40	.47

ACCESSORIES	
MODEL NUMBER	DESCRIPTION / USE WITH
AMF153TKB	TXV Kit, 2 – 3 Ton