


Direct Drive Vertical Fan Coil

Model DVB

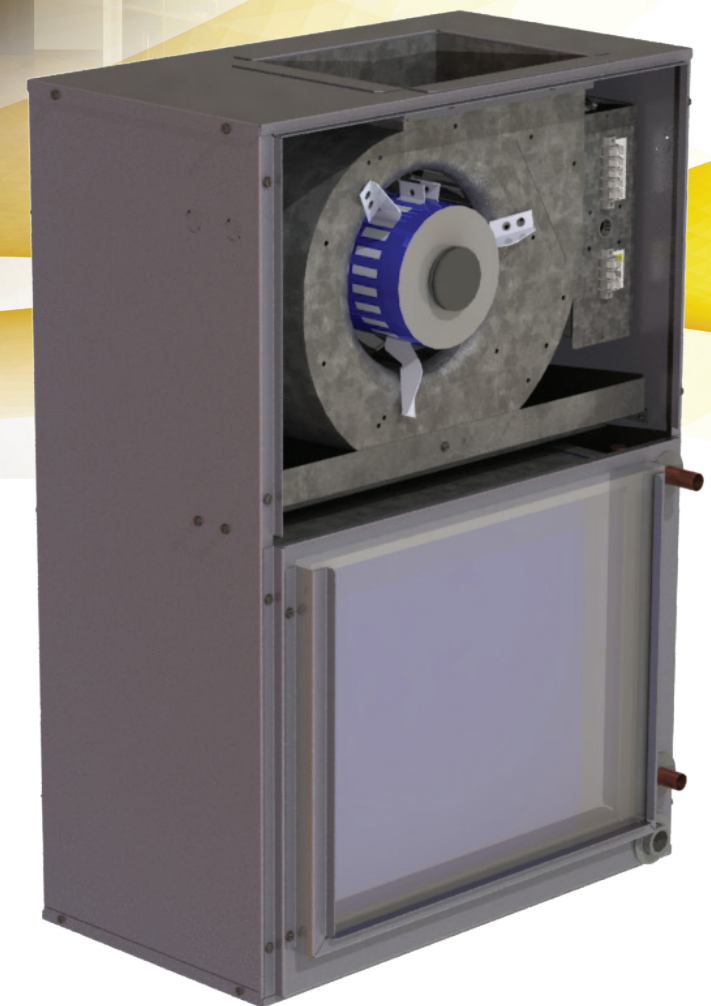

The entire line of Magic Aire DVB models is ETL listed to US and Canadian Safety Standards (ANSI/UL 1995).





Magic Aire is a member of AHRI and participates in the organization's voluntary performance verification programs.

Form: DVB08122024



Magic Aire®

DVB Fan Curves

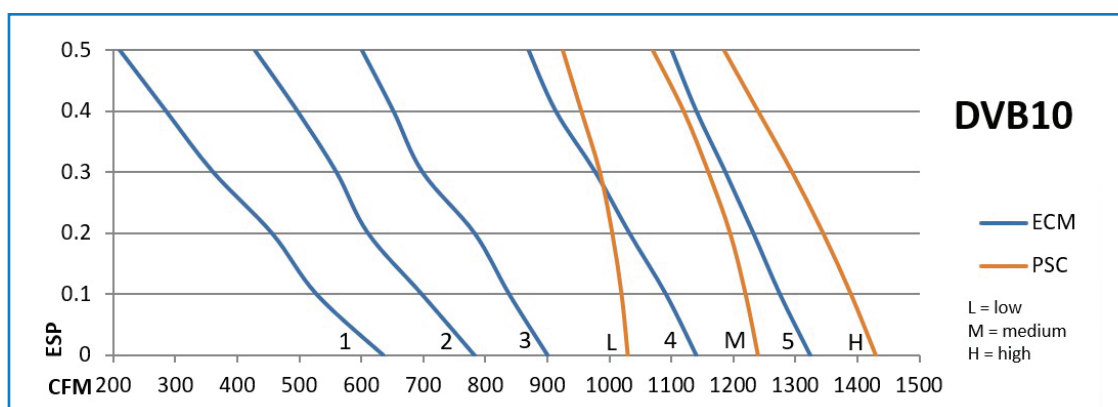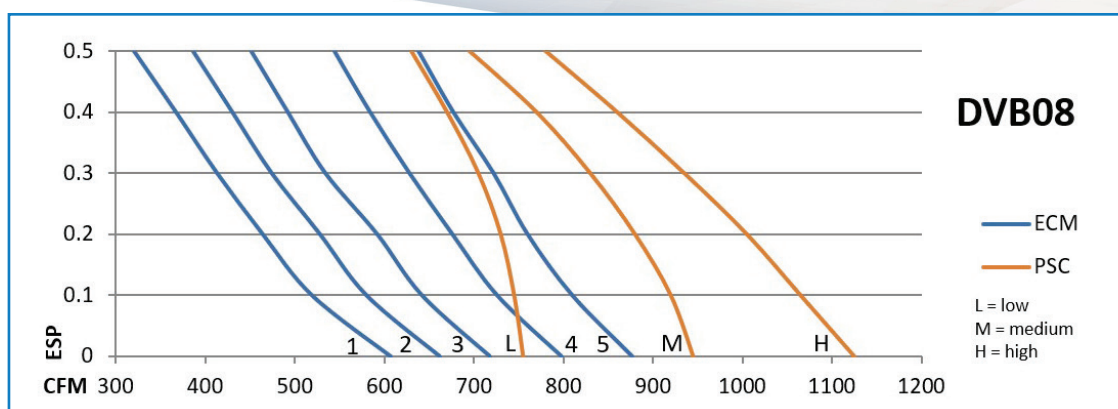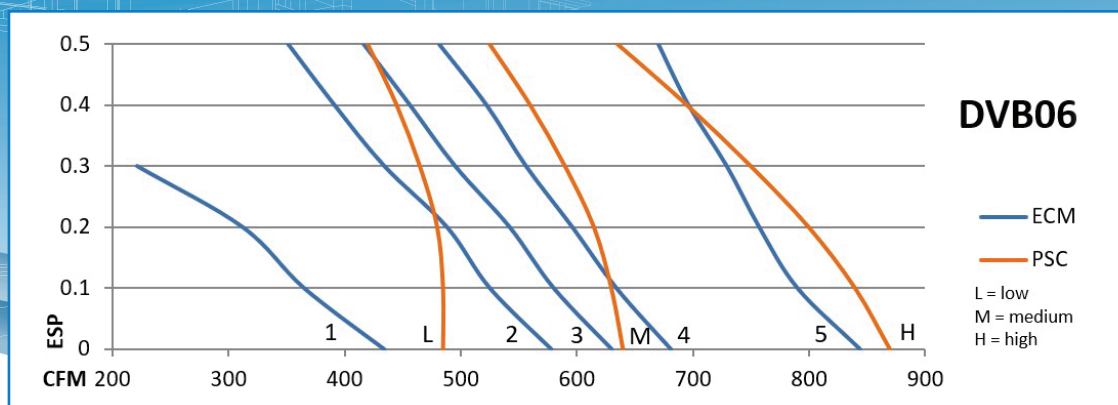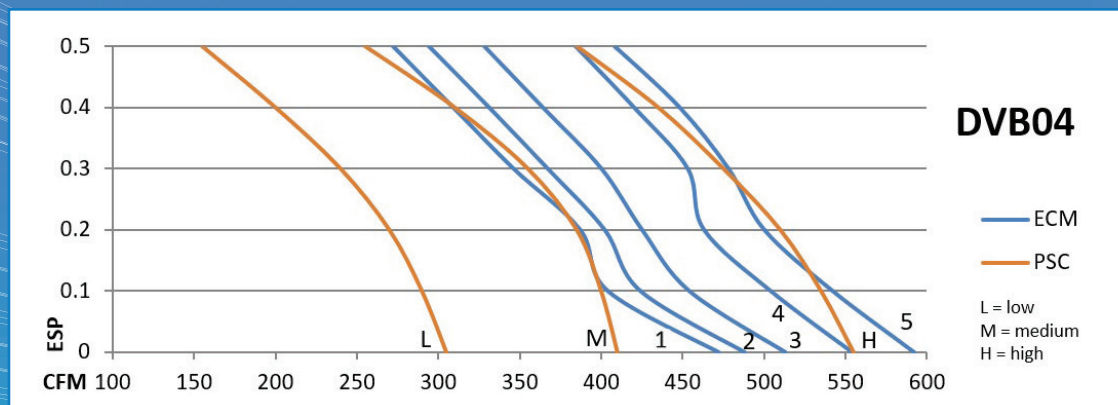

magicaire.com


501 Galveston Street • Wichita Falls, TX 76301 • 940-397-2100 • techsupport@magicaire.com

©2016 United Electric Co. LP: Manufacturer of Magic Aire branded HVAC equipment



To learn more about Magic Aire air handlers and to download our literature and software, please visit our website or contact your local sales representative.



When So Much Depends On Your Equipment

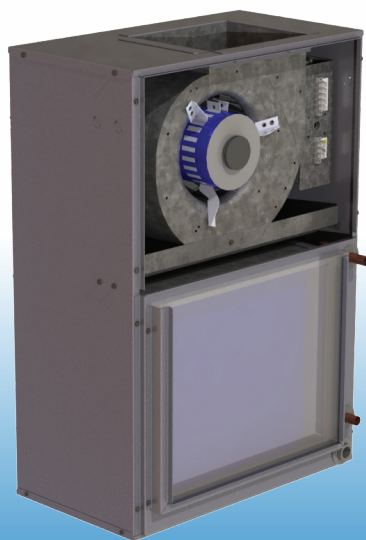


DVB Upflow Orientation Shown

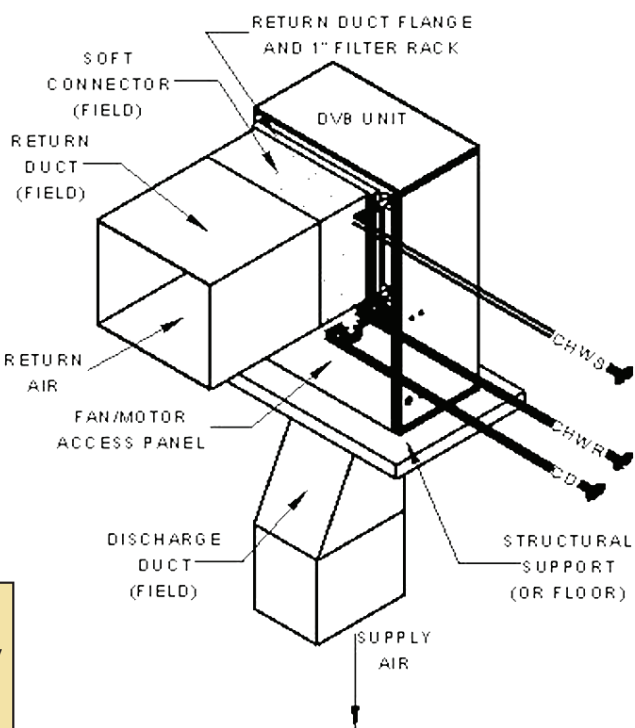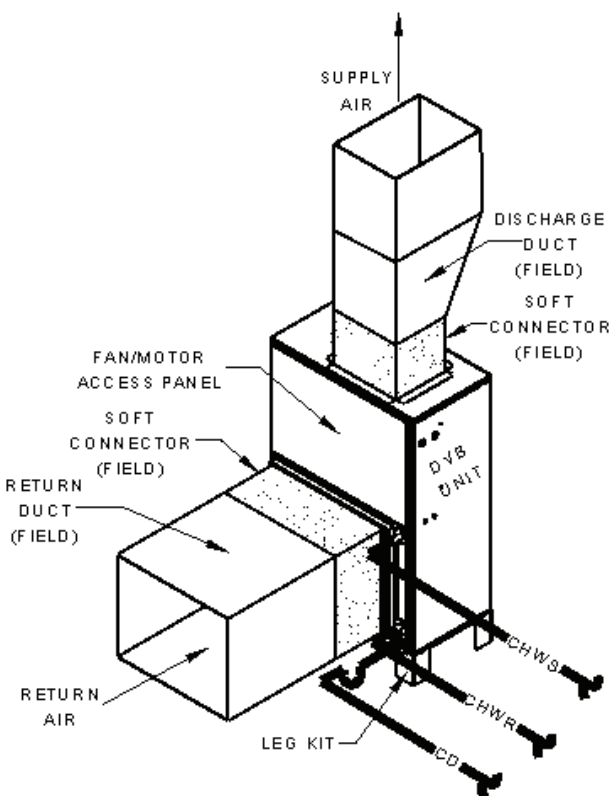

- Legend
- CHWS: Chilled Water Supply
 - CHWR: Chilled Water Return
 - CD: Condensate Drain

DVB Capacity Range (Reference software for published values)			
Model	Nominal Airflow (CFM)	Airflow Range (CFM)	Available ESP (in.w.g.)*
04	400.0	305 - 555	0.5
06	600.0	485 - 870	0.5
08	800.0	755 - 1125	0.6
10	1000.0	1030 - 1430	0.7

DVB Overall Dimensions			
Model Size	Width (A)	Height (B)	Depth (C)
04	24.0	26.5	14.0
06	24.0	30.5	14.0
08	24.0	34.5	14.0
10	29.0	36.3	15.0

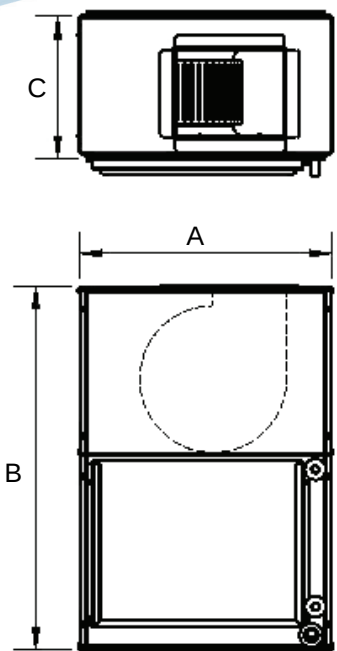

Highlighted Specifications

- Product Tested in accordance with:
- AHRI 410: Coil Capacity - Hydronic
 - AHRI 210: Coil Capacity - DX

- Product Certified:
- UL 1995 5th Ed Heating and Cooling Equipment
 - ETL Listed

Highlighted Features and Options

- Double sloped drain pan for improved IAQ
- Cooling coils: DX and 6 row CW available
- ECM – VE motor options
- Field-installed electric heat
- Field-installed 2-row hot water module
- Upflow or Downflow Configuration
- Valve packages—factory assembled and tested, field piped to unit

DVB Accessories

